


NO.	Type	尺寸(Unit : mm)										磁心参数				Al-value (nH/N ²)±25 %					功耗Max (W/set)					重量 (g/set)	
		A	B	C	C1	D	E	F	F1	F2	C1	Le	Ae	Ve	KP4	KP44	KP44A	KP90	KP95	KL7	KL10	KP4	KP44	KP44A	KP90		KP95
		(mm ⁻¹)	(mm)	(mm ²)	(mm ³)																						
UF8-1	8	8.0±0.15	5.0±0.1	17.0±0.3	11.0±0.2	3.0±0.15	3.0±0.15		3.0±0.15	2.0±0.1	0.76	25.00	32.90	823	2778	2778	2778	2546	3820			0.48	0.44	0.40	0.44	0.44	4.20
UU8.3-1	1	8.3±0.15	5.0±0.15	2.5±0.15		2.5±0.15	3.3±0.15				3.91	34.45	6.25	153					631								0.80
UU8.6	1	8.60±0.20	6.45±0.20	3.60±0.20		4.20±0.20	4.00min				4.03	32.20	8.00	258						1530	2185						1.30
UU9.5	1	9.5±0.2	6.25±0.15	4.9±0.1		3.65±0.15	3.5min				2.27	30.65	13.50	415													2.10
UU9.8	1	9.80±0.20	7.10±0.20	2.90±0.20		4.30±0.20	4.10min				4.38	34.60	7.90	273						1180	1460					0.15	1.40
UU10.5-1	1	10.50±0.30	7.85±0.20	5.00±0.20		5.35±0.20	5.20min				3.22	40.30	12.50	504						1700	2200						2.80
UU10.5-2	1	10.50±0.3	7.90±0.2	5.00±0.3		5.40±0.2	5.50±0.3				3.24	40.50	12.50	506						1900	2715						2.70
UU13-1/UQ13	6	12.8±0.25	9.1±0.15	9.5±0.2		6.7±0.15	5.7±0.2	4.75±0.15	4.75±0.15		2.11	47.54	22.60	1073													5.50
UU11-1	1	11.00±0.3	9.45±0.15	6.00±0.10/-0.30		7.05±0.15	6.00±0.3				3.30	47.90	14.50	697						1866	2666						3.55
UU15.6-1	1	15.60±0.20	5.60±0.10	16.00±0.20		1.60±0.15	7.60±0.30				0.53	34.20	64.00	2187	3983	3983	3983	3651	5477			1.35	1.23	1.11	1.23	1.23	11.70
UU15.6A-1	1	15.60±0.20	5.60±0.10	20.70±0.20		1.60±0.15	7.60±0.30				0.41	34.20	82.86	2833	5149	5149	5149	4720	7080			1.73	1.58	1.43	1.58	1.58	15.00
UU15.6-2	1	15.60±0.20	5.60±0.10	25.60±0.30		1.60±0.15	7.60±0.30				0.33	34.20	#####	3495	6397	6397	6397	5864	8796			2.12	1.93	1.75	1.93	1.93	18.40
UU15.7	1	15.70±0.30	9.90±0.30	6.00±0.20		6.10±0.25	6.50min				2.02	49.95	24.75	1236						2500	3200						6.45
UU17-1	1	17.55±0.3	4.9±0.15	36.0±0.55		0.75±0.15	7.55±0.20				0.21	32.30	#####	5094	8949	8949	8949	8699	11079			3.20	2.92	2.64	2.92	2.92	27.80
UU17-2	1	17.0±0.3	4.4±0.1	8.5±0.15		0.9±0.1	10.0±0.2				1.16	34.60	29.70	1029													5.80
UU18	1	18.00±0.30	10.00±0.20	6.00±0.20		6.50±0.20	9.00±0.30				2.35	55.90	23.80	1330	899	899	899	824	1236			0.79	0.72	0.66	0.72	0.72	6.90
UU19-1	5	18.8±0.3	13.4±0.2	17.0±0.25		10.4±0.2	8.8±0.25		5.0±0.15	5.0±0.15	1.44	71.75	49.70	3568													19.20
UU20-1	1	20.3±0.3	13.8±0.3	11.0±0.3		9.0±0.3	10.5±0.3				1.35	72.20	53.50	3860						4000							19.20
UU20-2	1	20.5±0.3	6.9±0.1	16.0±0.3		4.7±0.1	16.3±0.3				1.74	583.40	33.60	1962													10.10
UU23-1	1	23.1±0.4	13.0±0.2	6.3±0.15		6.7±0.20	10.5±0.20				1.70	67.60	39.70	2682	1266	1266	1266	1225	1637			1.55	1.42	1.28	1.42	1.42	13.50
UU23.8	1	23.80±0.40	15.50±0.20	4.00±0.20		9.50±0.20	11.80±0.20				3.35	80.50	24.00	1931	630	630	630	578	867			1.08	0.99	0.89	0.99	0.99	9.40
UU26-1	1	26.4±0.30	16.8±0.30	16.2±0.30		12.0±0.30	16.6±0.30				1.20	96.40	78.70	7584						5000							37.20
UU26-2	1	26.8±0.35	7.0±0.1	23.5±0.3		4.5±0.1	22.0±0.3				1.24	69.90	56.40	3944													20.20
UU28-1	1	25.6±0.3	6.0±0.1	28.0±0.4		1.5±0.1	13.1±0.3				0.35	48.50	#####	6637													36.30
UU29.8-1	7	29.8±0.4	9.75±0.15	24.5±0.35		6.9±0.15	24.4±0.4				1.29	85.46	66.10	5652													28.10
UU30-1	1	30±0.45	5.0±0.1	37±0.5		0.5±0.1	21.0±0.35				0.35	58.06	#####	9655													24.70

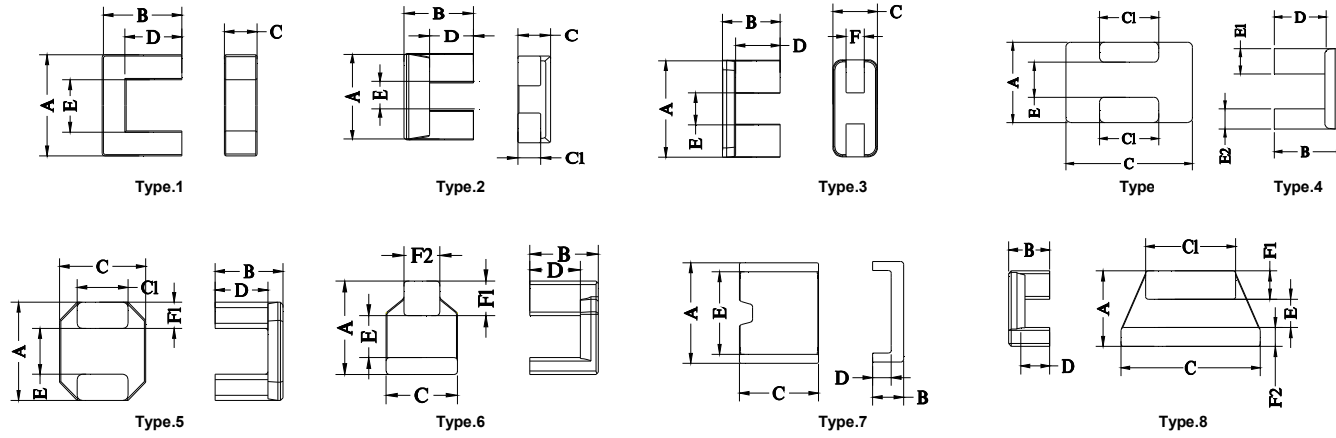

NO.	Type	尺寸(Unit : mm)										磁心参数				Al-value (nH/N ²)±25%						功耗Max (W/set)					重量 (g/set)								
		A	B	C	C1	D	E	F	F1	F2	C1	Le	Ae	Ve	KP4	KP44	KP44A	KP90	KP95	KL7	KL10	KP4	KP44	KP44A	KP90	KP95									
		(mm ⁻¹)	(mm)	(mm ²)	(mm ³)																														
UU32	1	32.0±0.4	20.3±0.15	3.0±0.2		16.7±0.15	24.7min					12.15	128.02	10.50	1349																				6.40
UU33-1	1	32.60±0.5	13.40±0.1	6.90±0.3		6.40±0.1	18.20±0.5					1.70	84.20	48.80	4120						3000	5174												21.70	
UU35.8	1	35.80±0.5	4.75±0.10	43.80±0.30		0.75+0.15/-0.10	27.80±0.30					0.41	71.12	#####	12452	5149	5149	5149	4720	7080							7.15	6.53	5.91	6.53	6.53			62.16	
UU40	1	40.00±0.5	29.50±0.2	13.00±0.3		13.50±0.2	8.10+0.40/-0.20					0.58	120.70	#####	25106	3638	3638	3638	3335	5002							15.11	13.80	12.48	13.80	13.80			131.40	
UU48-1	1	19.0±0.3	12.5±0.2	48.0±0.6		5.5±0.2	5.0±0.25					0.16	53.99	#####	18141	13195	13195	13195	12095	18143							11.30	10.32	9.34	10.32	10.32			98.30	
UU53-1	1	53.0±0.4	32.5±0.2	15.0±0.2		25.5±0.3	39.0±0.4					1.92	202.00	#####	21212																			103.20	
UU59-1	1	59.00+0.20/-0.60	33.50±0.2	15.00±0.2		23.50±0.3	39.00±0.4					1.35	203.00	#####	30450						4550	6500											152.00		
CUF20.5-1	3	20.60±0.3	12.75±0.2	9.85±0.25		9.85±0.2	6.60±0.2	4.00±0.15				2.80	78.00	28.00	2184	754	754	754	691	1037						1.25	1.14	1.04	1.14	1.14			10.90		
UF5-1	4	4.60±0.2	4.35±0.15	7.50±0.2	3.50±0.20	3.20±0.15	2.00±0.2			1.45REF	1.15REF	4.80	25.80	5.30	137	440	440	440	403	605	570	1400											3.03		
UF31	1	31.00±0.4	21.50±0.3	6.70±0.2		9.50±0.3	7.00±0.3					1.12	89.70	80.30	7203	1890	1890	1890	1732	2599						4.43	4.04	3.66	4.04	4.04			38.50		
UF38-1	2	38.00±0.50	24.80±0.30	11.50±0.30		15.80±0.20	12.00±0.40					1.18	118.56	#####	11901	1789	1789	1789	1640	2460						7.53	6.88	6.22	6.88	6.88			65.50		