




Type.1




Type.2



Type.3

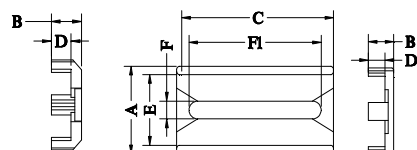

Type.4



Type.5

NO.	Type	尺寸(Unit : mm)								磁心参数				Al-value (nH/N ²)±25%				功耗Max (W/set)				重量 (g/set)	
		A	B	C	D	E	E1	F	F1	C1	Le	Ae	Ve	KP4	KP44	KP47	KP95	KP4	KP44	KP47	KP95		
										(mm ⁻¹)	(mm)	(mm ²)	(mm ³)										
EDR20-1	EDR2015	5	20.0±0.3	7.3+0.3/-0.1	26.5±0.4	5.8+0.3/-0.1	15.1±0.3		3.1±0.2		0.44	39.10	88.00	3444	4423	4423	4423	6347	2.13	1.94	1.67	1.94	18.50
EDR26-1	EDR26/9	4	14.0±0.3	4.2±0.15	25.9+0.3/-0.6	2.75±0.15	10.8min		2.85+0.1/-0.15	21.8±0.25	0.36	25.10	68.60	1722	3088	3088	3088	4431	0.95	0.87	0.75	0.87	8.30
EDR27-1	EDR2716.1	2	27.00±0.5	8.05±0.15	30.00±0.5	4.85±0.15	22.40±0.5	16.00±0.5	9.40±0.25	21.40±0.3	0.23	42.60	182.00	7753	9179	9179	9179	12621	4.73	4.32	3.71	4.32	41.10
EDR27-2	EDR2718.7	2	27.00±0.5	9.35±0.15	30.00±0.5	6.15±0.15	22.40±0.5	16.00±0.5	9.40±0.25	21.40±0.3	0.27	49.30	185.70	9156	7907	7907	7907	10872	5.23	4.78	4.11	4.78	45.50
EDR28-1		1	13.00±0.3	5.4±0.15	28.00±0.4	3.50±0.3	10.00min		3.20±0.13	26.00±0.4	0.35	29.20	83.50	2180	4308	4308	4308	6032	1.31	1.20	1.03	1.20	11.40
EDR28-2		1	13.00±0.3	4.85±0.1	28.00±0.4	3.10±0.1	10.00min		3.20±0.13	26.00±0.4	0.34	28.20	83.20	2038	4435	4435	4435	6209	1.22	1.11	0.96	1.11	10.60
EDR32-1		3	13.5±0.30	4.65±0.10	32.0±0.50	3.05±0.15	10.8min	9.3min	3.0±0.2	29±0.4	0.35	28.35	81.00	2005	4308	4308	4308	6032	1.47	1.36	1.14	1.36	10.90