


Type.1

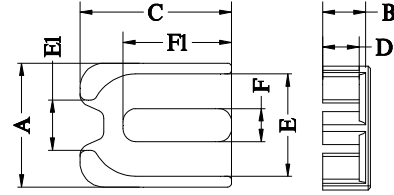

Type.2

NO.		Type	尺寸(Unit : mm)								磁心参数				Al-value (nH/N ²)±25 %				功耗Max (W/set)					重量 (g/set)
			A	B	C	D	E	E1	F	F1	C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	KP44	KP44A	KP47	KP95	KP4	KP44	KP44A	KP47	KP95	
ATP15-1	ATP15/8.3	1	15.00±0.5	4.15±0.13	11.20±0.4	2.75±0.15	12.40±0.4		5.10±0.2	6.35±0.25	0.82	27.60	33.80	933	2467	2467	2467	3540	0.48	0.44	0.40	0.40	0.44	4.20
ATP15-2	ATP15-1A	2	15.00±0.50	6.00±0.10	19.00±0.40	4.60±0.10	12.40±0.40	6.10±0.40	4.00±0.20	13.60±0.25	0.58	30.60	52.60	1610	3488	3488	3488	5005	1.01	0.92	0.84	0.84	0.92	8.80
ATP15-3	ATP15-3A	2	15.00±0.50	5.10±0.10	24.00±0.40	3.60±0.15	12.40±0.40	6.10±0.40	4.00±0.20	18.60±0.25	0.39	27.56	70.06	1930	5188	5188	5188	7443	1.18	1.08	0.98	0.98	1.08	10.30